

+ Thank you

Welcome to contact us and we would try our best to satisfy with all your requirements. We wish to build long business relationship with you!



Add: No. 2-1403, Haiyi International Center, Huayuan Industrial Park,
Nankai District, Tianjin, China.

Tel: 86-22-87820460

Email: Belle@tjqiangbang.com

<http://tjqiangbang.com>

COMPANY

TIANJIN QIANGBANG INDUSTRIAL CO.,LTD

Trust your choice

A professional company with a complete range of high-tech agricultural machinery parts

CONTENTS

手册目录

MANUAL CONTENTS

01 公司简介 COMPANY PROFILE

02 产品介绍 PRODUCT DESCRIPTION

- | | |
|----------------------------|-----------------------------|
| 01 旋耕刀 Tiller blade | 09 收割机刀片 Harvester blade |
| 02 开垦刀 Rotavator blade | 10 收割机刀条 Cutter bar Assy |
| 03 旱地刀 Dry-land blade | 11-12 传动轴 PTO drive shaft |
| 04 圆盘刀片&耙片 Disc blade | 13 螺栓 Bolts |
| 05 犁尖 Plow tip | 14 螺母 Nuts |
| 06 犁铲 Plow shovel | 15 护刃器 Knife Guard |
| 07 锤爪 Hammer blade | 16 喷雾器 Agricultural sprayer |
| 08 弹尺 S-type spring handle | |

COMPANY

公司简介


COMPANY PROFILE

Tianjin Qiangbang Industrial Co., Ltd. Relying on Tianjin Daqiang Steel Co., Ltd. Covering a total area of 280,000 square meters. There are 1,300 employees. Among them, there are more than 290 engineers and technicians. It is a comprehensive medium to large-sized enterprise.

Our agricultural machinery raw materials are produced by ourselves. The raw material of accessories has been tested professionally in many aspects. We can provide Agricultural Machinery and Accessories suitable for tractors such as Disc ploughs、Disc harrows、Rotary tiller、Mowers、Walking tiller-Tiller blade、Rotavator blade、Disc blade、Harvest blade、Knife guard、Plow tip etc, and our products enjoy a good reputation in China and abroad.



旋耕刀
Tiller blade

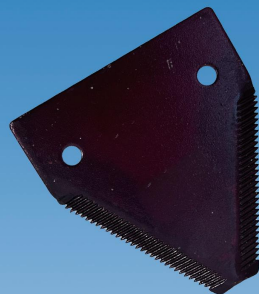


收割机刀片
Harvester blade




开垦刀
Rotavator blade



护刃器
Knife Guard

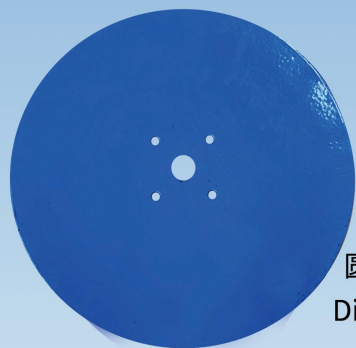

圆盘刀片
Disc blade



锤爪
Hammer blade



旱地刀
Dry-land blade



收割机刀条
Cutter bar Assy



传动轴
PTO drive shaft



弹尺
S-type spring handle



螺栓螺母
Bolts and nuts



犁铲
Plow shovel



犁尖
Plow tip

TILLER BLADE

Description

- 1、Material : 65Mn、60Si2Mn or as clients request.
- 2、Hardness of the heat treatment : HRC38-54 (Blade-HRC48-54,handle-HRC38-45).
- 3、Main Application : With the four wheel tractors or the walking tractors as the main power source,professional for rotary tillage, stubble cleaning,ridging in the field or the garden.



Specifications

编号 NO.	孔径 Hole Dia (mm)	孔距 Hole Dis (mm)	工作高度 Working High (mm)	工作半径 Working Radius (mm)	刀柄厚度 Plate size (mm)	重量 Weight (kg)
QB-1	10.5		53	225	25*9	0.45
QB-2	10.5	24	45	240	25*10	0.55
QB-3	10.5		50	220	25*10	0.55
QB-4	12.5		50	245	30*10	0.65
QB-5	10.5		60	245	25*10	0.6
QB-6	10.5		55	235	25*10	0.55
QB-7	10.5		50	225	25*9	0.5
QB-8	10.5	32.5	42	225	24*7.5	0.5

ROTAVATOR BLADE

Description

- 1、Material : 65Mn、60Si2Mn、28MnSiB 30MnCrB5 or customized.
- 2、Hardness of the heat treatment : HRC45 +3 (the blades show better comprehensive mechanical properties).
- 3、The tractor as the main power source, professional for the cultivation,grass,ridging and field work.




Specifications

编号 NO.	孔径 Hole Dia (mm)	中心距 Hole Dis (mm)	规格 Plate (mm)	重量 Weight (kg)	“H” (mm)	“L” (mm)	“S” (mm)
QB-R1	16.5	68	90*10	1.92	142	257	30
QB-R2	12.5	46	60*6	0.68	110	110	10
QB-R3	14.5	57	80*7	1	135	185	14
QB-R4	12.5	42	60*6	0.62	105	157	8
QB-R5	12.5	42	70*6	0.7	115	185	10
QB-R6	13	57	90*6	1.08	140	170	
QB-R7	14.5	46	80*8	1.17	110	205	22
QB-R8	12.5	44	60*6	0.61	115	194	12
QB-R9	12.5	44	60*6	0.66	115	190	12
QB-R10	12.5	44	70*6	0.74	110	193	16
QB-R11	12.5	44	70*6	0.76	110	187	8
QB-R12	14.5	57	80*8	1.2	136	195	12

DRY-LAND BLADE

Description

- 1、Material : 65Mn.
- 2、Thickness : 4-6mm (Can customized according to customer's request).
- 3、Main Application : Mini-Tiller accessories, can be used to turn over soil, broken soil.

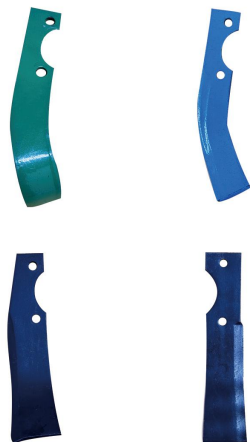


Specifications

编号 NO.	孔径 Hole Dia (mm)	孔距 Hole Dis (mm)	工作高度 Working High (mm)	工作半径 Working Radius (mm)	刀柄厚度 Plate size (mm)	重量 Weight (kg)
QB-D1	10.5	70	65	240	40*6	0.4
QB-D2	10.5	70	55	215	40*6	0.4
QB-D3	11	70	60	230	40*6	0.4
QB-D4	11	70	50	230	40*6	0.35
QB-D5	12	70	60	235	40*6	0.37

DISC BLADE

Description

- 1、Material : 65Mn、Boron steel.
- 2、Thickness : 3-12mm (Can customized according to customer's request).
- 3、Main Application : Mini-Tiller accessories, can be used to turn over soil, broken soil.



Specifications

DISCS shape	MODEL (Diameter*Thickness)		Raw material and hardness
	14"*3mm	355mm*3mm	65MN---38-42HRC Boron steel---50-55HRC
	16"*3mm	406mm*3mm	
	18"*3mm	460mm*3mm	
	18"*4mm	460mm*4mm	
	20"*3mm	510mm*3mm	
	20"*3.5mm	510mm*3.5mm	
	20"*4mm	510mm*4mm	
	20"*5mm	510mm*5mm	
	22"*4mm	560mm*4mm	
	22"*4.5mm	560mm*4.5mm	
	22"*5mm	560mm*5mm	
	22"*6mm	560mm*6mm	
	24"*4mm	610mm*4mm	
	24"*5mm	610mm*5mm	
	24"*6mm	610mm*6mm	
	26"*5mm	660mm*5mm	
	26"*6mm	660mm*6mm	
	28"*6mm	710mm*6mm	
	26"*7mm	660mm*7mm	
	28"*7mm	710mm*8mm	
	26"*8mm	660mm*8mm	
	28"*8mm	710mm*8mm	
	30"*8mm	760mm*8mm	
	32"*8mm	810mm*8mm	
	32"*9mm	810mm*9mm	
	32"*10mm	810mm*10mm	
	32"*12mm	910mm*12mm	


PLOW TIP

Description

- 1、Material : 65Mn、60Si2Mn or as clients request.
- 2、Hardness of the heat treatment : HRC45+/-3.
- 3、Main Application : The four wheel tractor as the main power source, mainly adapted to the cultivator field furrowing and ridging working.



Specifications

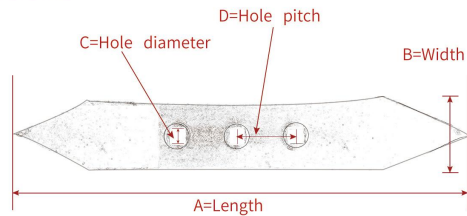

	Length (mm)	Wength (mm)	Hole Dia. (mm)	Hole Picth (mm)	Thickness (mm)	Hole Qty (pcs)	Weight (g)
	A	B	C	D			
1	135	36	M10		5	1	190
2	218	35	M10		6	1	380
3	210	37	M10	42.48	6	2	380
4	210	35	M10		6	1	385
5	255	42	M10		6	1	660
6	337	75	M12	45	10	2	1650
7	288	70	M12	45	6	1	825



PLOW SHOVEL

Description

- 1、Material : 65Mn、60Si2Mn or as clients request.
- 2、Hardness of the heat treatment :HRC45+/-3.
- 3、Main Application : The four wheel tractor as the main power source, mainly adapted to the cultivator field furrowing and ridging working.



Specifications



长度 Length (mm)	宽度 Width (mm)	高度 Height (mm)	厚度 Thickness (mm)
A	B	C	
310	280	50	4
300	230	110	5
250	210	110	6
260	240	160	5
180	220	100	5
500	400	160	6
200	155	80	4
550	420	160	6
185	230	120	5

HAMMER BLADE


Description

1、The four-wheel tractor as the main source of power,Through one time Operation, can be finished of grass cutting, And mixed with soil and stubble to help break down organic matter and increase soil fertility .

2、Material made with:45# 40Cr 65Mn 60Si2Mn 30MnCrB5.



Specifications



No.	A (mm)	B (mm)	C (mm)	D=Hole (mm)	Suit	Weight(g)
1	40	120	90	20.5	MASCHIO	1150
2	40	120	110	20.5	MASCHIO	1350
3	40	120	110	16.5	MEAAT	1350
4	40	137	95	16.5	MEAAT	1600
5	60	70	80	30.5	OSMA	1700
6	55	150	100	20.5	ORSI	1550
7	40	120	110	16.5	ORSI	1350


S-TYPE SPRING HANDLE

Description


1、The four-wheel tractor as the main power source,and it is suitable for dry (loose) soil operation, especially for crops with higher requirements (such as sugar beet), The recommended operating depth is 2-8cm, the power is 18-22 horsepower /m, the operating speed is maintained at 6-7km/h and the spacing is 40-50cm.

2、Material selection:60Si2Mn, 30MnCrB5, 38MnCrB5, 28MnSiB.

3、The original shape can be restored to the maximum extent in special treatment, HRC:46-52.

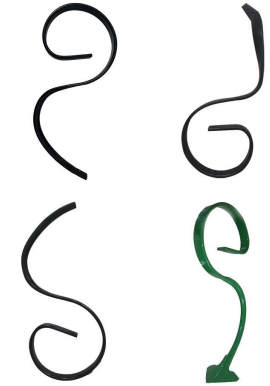

Specifications



No.	Section (mm)	Weight (kg)
Tine 1	32*10	2.26
Tine 2	32*10	2.66
Tine 3	32*10	2.68
Tine 4	32*10	3.08
Tine 5	40*6	0.37
Tine 6	10*38	0.03



No.	Section (mm)	A(mm)	Weight (kg)
Tine 1	45*10	165	3.68
Tine 2	45*10	165	4.08
Tine 3	45*10	105	3.5
Tine 4	45*10	105	3.9
Tine 5	45*10	170	3.7
Tine 6	45*10	170	4.1
Tine 7	45*6	170	0.37
Tine 8	10*38	170	0.03


HARVESTER BLADE

Description

- 1、Material: High quality 65Mn Spring Steel .
- 2、Thickness:2.00mm;2.80mm.
- 3、Surface Treatment:Only with Anti-rust Oil;
Varnish Stoving Galvanized;Blueing
Chromeplate, etc.
- 4、Main Application: Knife Sections & Ledger
Blade are used in Harvesting Machines like
Combine Harvesters Straw Reapers,Mowers
and Threshing Machines, etc.




Specifications



Item No.:QB001					
A	76	B	51.5		
C	84.7	D	6.5		
E	19.25	F	13		
T	3				

Item No.:QB002					
A	76	B	51.5		
C	81	D	5.8		
E	15.2	F	11		
T	2				

Item No.:QB003					
A	76	B	51.5		
C	80	D	5.5		
E	15	F	15		
T	2				



Item No.:QB004					
A	41	B			
C	90	D	19		
E		F			
T	3				

Item No.:QB005					
A	49	B			
C	105	D	21		
E		F			
T	3				

Item No.:QB006					
A	44	B			
C	102	D	16		
E		F			
T	4				


CUTTER BAR ASSY

Description


- 1、Material: Knife Back use Cold-Drawn Steel;
Knife Section use 65Mn.
- 2、Main Application: Harvesting Machines like
Combine Harvesters(New Holland John Deere,
Swaraj etc.)Mower,Reaper,etc.




Specifications

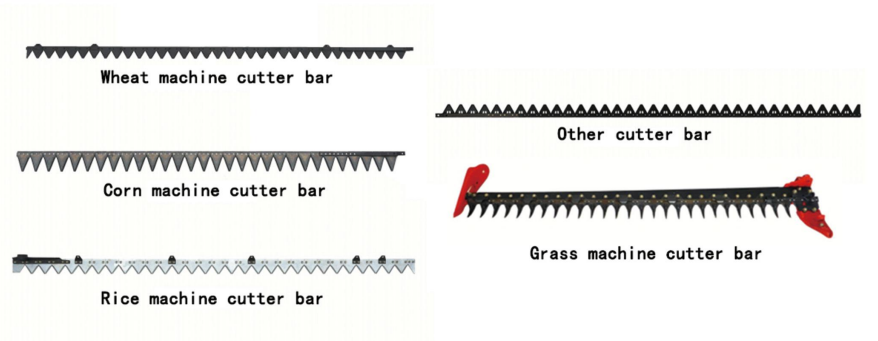


PTO DRIVE SHAFT




Type	Cross	Joint simple		Spline yoke	Tube yoke		Tube	
		Inner	Outer		Inner	Outer	Inner	Outer
	1	2	3	4	5	6	7	8
T110	22*54	T110001	T110002	A110138	T1226	T1233	T263	T332
T220	23.8*61.2	T220001	T220002	A220138	T2229	T2236	T293	T363
T311	27*70	T311001	T311002	A311138	T3236	T3243	T363	T433
T421	27*74.6	T421001	T421002	A421138	T4236	T4243	T364	T433
T500	30.2*80	T500001	T500002	A500138	T5245	T5252	T454	T523
T622	30.2*92	T622001	T622002	A622138	T6245	T6254	T454	T544
T723	30.2*106.5	T723001	T723002	A723138	T7245	T7254	T455	T544
T7N	34.9*94	T7N001	T7N002	A7N138	T7N245	T7N254	T455	T544
T824	34.9*106.5	T824001	T824002	A824138	T8254	T8263	T544	T634



Type	Cross	Joint simple		Spline yoke	Tube yoke		Tube	
		Inner	Outer		Inner	Outer	Inner	Outer
	1	2	3	4	5	6	7	8
L2100(L010)	22*55	L010001	L010002	A010138	L010223	L010230	L235	L303
L2200(L220)	23.8*61.2	L220001	L220002	A220138	L220234	L220241	L344	L413
L311	27*70	L311001	L311002	A311138	L311234	L311241	L344	L413
L2300(L421)	27*74.6	L421001	L421002	A421138	L421234	L421241	L344	L413
		L421003	L421004		L421239	L421248	L395	L484
L622	30.2*92	L622001	L622002	A622138	L622239	L622248	L395	L484
L2400(035)	32*76	L035001	L035002	A035138	L035239	L035248	L395	L484



Type	Cross	Joint simple		Spline yoke	Tube yoke		Tube	
		Inner	Outer		Inner	Outer	Inner	Outer
	1	2	3	4	5	6	7	8
S622	30.2*92	S622001	A622138	A622138	S622251	S622261	S510	S614
S723	30.2*106.5	S723001	A723138	A723138	S723251	S723261	S510	S614
S824	34.9*106.5	S824001	A824138	A824138	S824251	S824261	S510	S614
2400(035)	32*76	S035001	A035138	A035138	S035251	S035261	S510	S614
2500(036)	36*88.8	S036001	A036138	A036138	S036251	S036261	S510	S614
2600(026)	42*104	S026001	A026138	A026138	S026251	S026261	S614	S710



Type	Cross	Joint simple		Spline yoke	Tube yoke		Tube	
		Inner	Outer		Inner	Outer	Inner	Outer
	1	2	3	4	5	6	7	8
G500	30.2*80	G500001	G500002	A500138	G5004012	G500C58	G40-Z12	58*3
G622	30.2*92	G622001	G622002	A622138	G6224012	G622C58	G40-Z12	58*3
G7N	34.9*94	G7N001	G7N002	A7N138	G7N4515	G7NC65	G45-Z14	65*3.5
G824	34.9*106.5	G824001	G824002	A824138	G8244514	G824C65	G45-Z14	65*3.5
G2600(G026)	42*104	G026001	G026002	A026138	G0265520	G026C75	G55-Z20	75*4


BOLTS

Description

- 1、Class : 4.8、 8.8、 10.9、 12.9.
- 2、 Specifications: M3-M48.
- 3、 Surface treatment: pain white black cklored HDG.
- 4、 Material : Q235、 35k、 45#、 20MnTiB、 40Cr、 35CrMoA.



Specifications

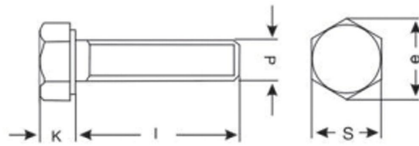

d	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
p	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	3	3	3	3.5
k	2.8	3.5	4	5.3	6.4	7.5	8.8	10	11.5	12.8	14	15	17	18.7
s	7	8	10	13	17	19	22	24	27	30	32	36	41	46


NUTS:

Description

- 1、 Class : 4.8、 6.8、 8.8、 10.9.
- 2、 Specifications: M6-M48.
- 3、 Surface treatment: pain white black cklored HDG.



Specifications



d	M2	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18
s max	4	5.5	7	8	10	13	17	19	22	24	27
s min	3.82	5.32	6.78	7.78	9.78	12.73	16.73	18.57	21.57	23.67	26.16
m max	1.6	2.4	3.2	4	5	6.5	8	10	11	13	15
m min	1.35	2.15	2.9	3.7	4.7	6.14	7.64	9.64	10.3	12.3	14.3

d	M20	M22	M24	M27	M30	M33	M36	M39	M42	M45	M48
s max	30	32	36	41	46	50	55	60	65	70	75
s min	29.16	31	35	40	45	48	53.8	58.8	63.1	68.1	73.1
m max	16	18	19	22	24	26	29	31	34	36	38
m min	14.9	16.9	17.7	20.7	22.7	24.7	27.4	29.4	32.4	34.4	36.4

KNIFE GUARD

Description

- 1、Material: Ductile Casting Iron, Precision Casting Steel, Forged, Stamping Steel Plate, etc.
- 2、Main Application: Harvesting Machines like Combine Harvesters (New Holland, John Deere, Case, Kubota, etc.), Mower, etc.
- 3、Note: Can be made according to customers' drawing or samples.



Specifications

					
NO.:QB001	NO.:QB002	NO.:QB003	NO.:QB004	NO.:QB005	NO.:QB006
					
NO.:QB007	NO.:QB008	NO.:QB009	NO.:QB010	NO.:QB011	NO.:QB012
					
NO.:QB013	NO.:QB014	NO.:QB015	NO.:QB016	NO.:QB017	NO.:QB018

AGRICULTURAL SPRAYER

Description

- 1、Capacity: 16L/18L/20L.
- 2、Type: Manual/Electric/Two-in-One/Solar.
- 3、Color: Blue, Yellow, Red or customized.
- 4、Nozzle: Single/Double/5 Holes.
- 5、Packing: 1pcs/color box.



Specifications

